

Map tiles

Patrick Brown

September 17, 2014

The following are some examples of maps produced with
`mymap=openmap(x, path="something")`

```
1 plot (openmap(x,path=" osm "))
```



```
2 plot (openmap(x,path=" osm-transport "))
```



```
3 plot (openmap(x,path=" bw-mapnik "))
```



```
4 plot RGB (openmap(x,path=" mapquest "))
```



```
5 plot (openmap(x,path=" mapquest-sat "))
```

mapquest-sat is
not currently
available

6 `plot (openmap(x,path=" landscape "))`



7 `plot RGB (openmap(x,path=" opentopomap "))`



8 `plot (openmap(x,path=" maptoolkit "))`



9 `plot (openmap(x,path=" waze "))`



10 `plot (openmap(x,path=" mapbox "))`

mapbox is
not currently
available

11 `plot (openmap(x,path=" humanitarian "))`



```
12 plot (openmap(x,path=" parking-bw "))
```




```
13 plot (openmap(x,path=" osm-locale-de "))
```



```
14 plot (openmap(x,path=" bw-noicons "))
```



```
15 plot (openmap(x,path=" stamen-toner "))
```

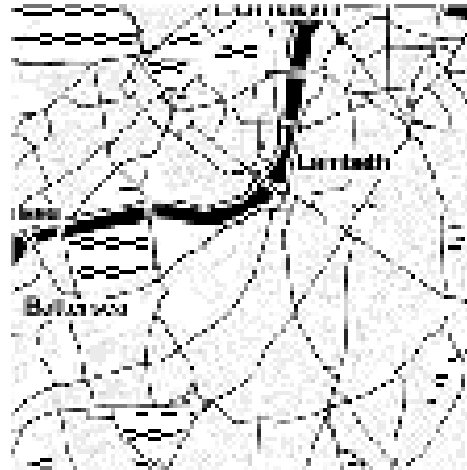

```
16 plot RGB (openmap(x,path=" stamen-watercolor "))
```

